

# RTC Rotary Table Chuck



## Application / Benefits


Suitable for indexing  
Soft jaws compatible with standard power chucks

## Technical features

Sealed against coolant and chips  
Built in air cylinder with compact design

## SPECIFICATIONS

	RTC-110	RTC-160	RTC-210	RTC-260
Thru Hole Dia. [mm]	8	20	30	43
Jaw Stroke Dia. [mm]	5.2	5.2	6.3	6.3
Plunger Stroke [mm]	11.3	11.5	13.7	13.6
Max. Static Gripping Force [kN(kgf)]	7.5	21	33	48
Max. Pneumatic Pressure [MPa(kgf/cm <sup>2</sup> )]	0.7 (7)	0.7 (7)	0.7 (7)	0.7 (7)
Max. r.p.m. [min <sup>-1</sup> ]	100	72	50	50
Weight (included Soft Jaws) [kg]	7.3	22	27.7	42.5

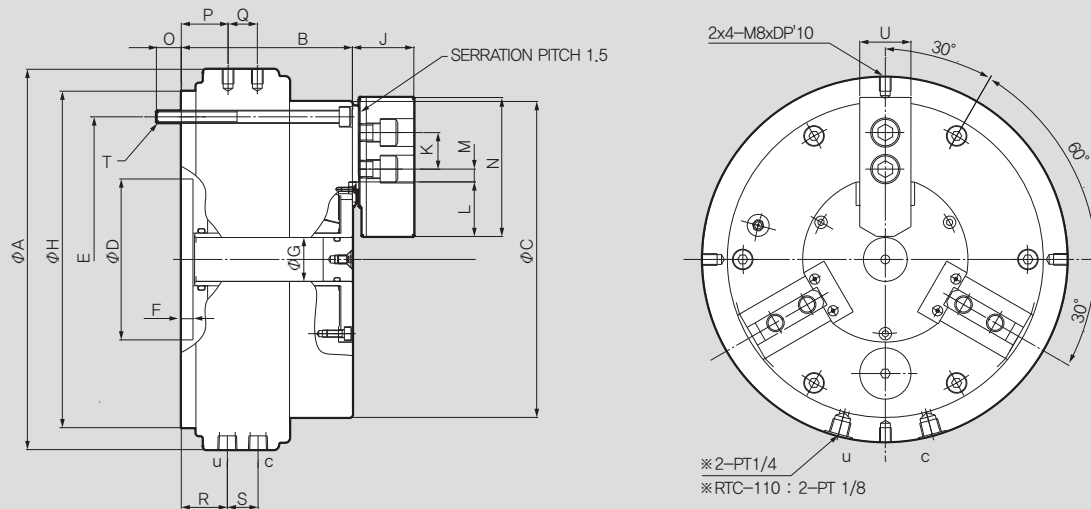

※ It is recommended to grease chucks at least twice a day in order to maximize longevity.

## DIMENSIONS

	RTC-110	RTC-160	RTC-210	RTC-260
$\Phi A$	145	210	260	304
B	92	102	117	125
$\Phi C$	113	166	216	264
$\Phi D$ (기준경)	80	80	110	140
E	98	148	195	234
F	6	7	8	8
$\Phi G$	8	20	30	43
$\Phi H$	124	175	230	268
J	27	36	42	46
K	14	20	25	30
L max.	32.8	41.9	53	66
L min.	30.2	39.3	49.85	62.85
M max.	5.4	9.25	14.75	16
M min.	2.4	4.75	8.75	8.5
N	55	72	95	110
O	11	15	17	16
P	25.5	31	32	39.5
Q	12.2	18	20	21
R	25.5	32.3	31.5	39.5
S	12.2	15.2	21	21
T	M6x95L	M8x105L	M8x125L	M10x130L
U	23	31	35	40